



Portable 22 kW wallbox

# JUICE BOOSTER 2

Simply take your wallbox with you. Charge from any electrical outlet, anywhere. No more worries about reach.



With JUICE BOOSTER 2 you can always charge at maximum speed, in complete safety, irrespective of the power connection type – automatically adjusted to the right setting. Both at home and abroad.



**Successfully tested on a continuous basis**  
We guarantee compatibility with all existing and new electric cars on the market fitted with a Type 2 or Type 1 connector.




**Rugged**  
Ruggedly durable weather-proof aluminium housing (splashproof and dustproof when connector is plugged in; housing is submersion-proof).




**Secure JUICE CONNECTOR**  
The aluminium connector design is based on aerospace technology and driveover-resistant, offering guaranteed safety, reliability and flexibility every time you charge.

# JUICE BOOSTER 2


The portable wallbox for anywhere and everywhere

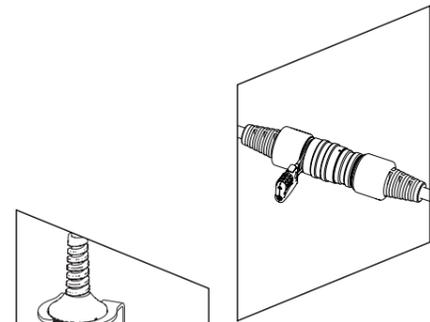


**The adapter lock**  
The ultimate theft deterrent for private use or in public places.

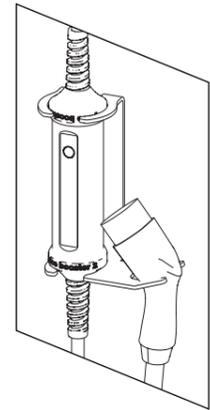

**Wallbox**  
The JUICE BOOSTER 2 can also be used as a wall-mounted charging station by fitting the specially designed holder bracket.



**JUICE CONNECTOR**  
Automatic adapter recognition with fully automatic charging power adjustment.

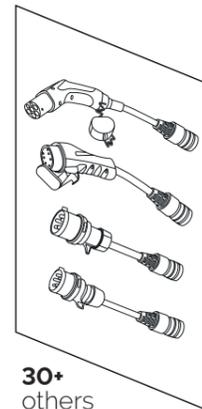


30+ others

**Portable charging station**  
Charge your car worldwide worry-free thanks to the comprehensive assortment of adapters for all standard household and industrial socket outlets.

**5-m cable length**  
The cable length can even be extended to as much as 25 m by using an extension cable.

(Extension cable not provided for in the standard, so it carries no CE marking.)

**Good to know**  
JUICE BOOSTER 2 is a real 3-in-1 solution, now available in a compact format.

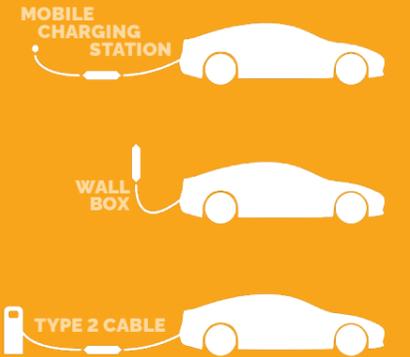

**100% compatible**  
with all electric vehicles fitted with a Type 2 connector. Also available with a Type 1 connector.




## Individual design

Compatible with all electric cars fitted with a Type 2 or Type 1 connector.

Single-, 2- or 3-phase charging at currents up to 32 amps – no matter whether at 3,7 / 7,4 / 11 or 22 kW charge power level. Under ideal conditions, your battery will be fully charged within just 1 to 4 hours, depending on its size.

In short: JUICE BOOSTER 2 is the perfect charging station for all-round use.




**Type 2 cable**  
Only one cable required: With the JUICE BOOSTER 2 and Type 2 adapter, you no longer need any separate Type 2 cable, even for public charging stations.



**Waterproof**  
Operable in any kind of weather.


**JUICE-CELSIUS**  
The JUICE CELSIUS temperature sensor integrated into household adapters detects any overheating (e.g. in poorly wired power sockets), thereby preventing potential fires.

**Ultra-light**  
Weighs in at less than 1 kg.



**Up to 3-tonne wheel loads**  
Driveover-resistant even to heavy wheel loads.

**Keep things neat and tidy**  
Comes with a free rugged carrier bag with integrated Velcro strips for optimum storage in the boot.



**Integral residual current detection**  
DC and AC fault detection trips effectively at the specified value.

**Residual-current circuit breaker**  
Integrated DC and AC fault-current protection eliminates the need to install an expensive residual-current circuit breaker in your home, saving you costs and labor of up to 840 pounds.

## Technical specifications

Dimensions	Diameter: 70 mm, Length: 225 mm
Weight	1,0 kg excluding cables, 3,2 kg with cables and plugs
Power	1,4 kW – 22 kW AC
Rated current	6 A to 32 A
Mains voltage	230 V (single-phase) / 400 V (3-phase)
Material – colour	Anodised aluminium, anthracite
Operating ambient temperature	-30 °C to +50 °C

CE conformity	IEC 62752, 62196, 61851-1, Mode 2/3, EMC, RoHS
Protection rating - RCD – safety	IP67 - RCD DC 6 mA, AC 30 mA - Earth conductor, temperature monitoring
Mains-end plug	Over 30 self-detecting adapters are available for domestic, industrial and EV sockets, 1,4 m power cable + approx. 30 cm adapter
Vehicle-end connector	Type 2 (EN 62196) / Type 1 (SAE J1772), cable length 3,1 m

Subject to change without notice.



# JUICE BOOSTER 2

Travel without a care  
in the world



Find more information and accessories here:  
[juice-technology.com/juice-booster](http://juice-technology.com/juice-booster)

