

THE FIRST STEP INTO SMART HEATING

Radiator Thermostat – basic

HmlP-eTRV-B-2

With or without control unit: The smart Homematic IP Radiator Thermostat saves up to 33 % on energy. This reduces heating costs, lowers CO₂ emissions and provides comfortable temperatures.



homematic ^{IP}
Smart living, simply comfortable

SAVE HEATING COSTS


Individual temperature profiles are easily created via app – with up to 3 adjustable heating profiles and 13 changes per day. In this way, the heating is switched on only if needed. And during ventilation, the room temperature is automatically reduced thanks to the open-window function.

COMFORT TEMPERATURE AT ALL TIMES

The room temperature is controlled according to the individual needs of the user: simply via app, whether at home or on the road, directly on the device using the push-buttons or conveniently via voice control (via Amazon Alexa or Google Assistant).

OPEN-WINDOW DETECTION

The Homematic IP Window and Door Contact offers exact detection of open windows and doors. The room temperature is automatically reduced to avoid any waste of energy.

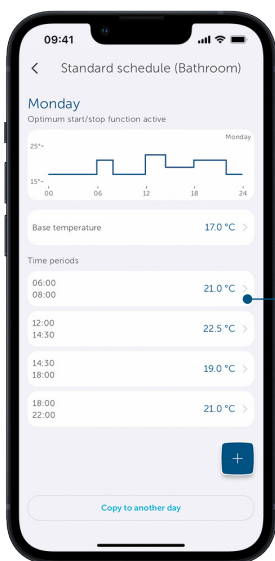

Individual heating profiles via the free Homematic IP app



TECHNICAL SPECIFICATIONS

Supply voltage	2x 1.5 V LR6/mignon/AA
Current consumption	100 mA max.
Battery life	2 years (typ.)
Degree of protection	IP20
Ambient temperature	0 to 50 °C
Dimensions (W x H x D)	57 x 68 x 102 mm
Weight	185 g (including batteries)
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typical open area RF range	250 m
Connection	M30 x 1.5 mm

SECURE AND EASY INSTALLATION

The union nut enables secure installation to standard radiator valves with M30 thread size. Quick and easy installation without having to drain any water or intervening in the heating system.

MANY ADDITIONAL FUNCTIONS

- ✓ Boost function for quick heating of rooms
- ✓ Eco mode for energy-saving operation with reduced room temperature
- ✓ Valve protection function against calcification of the valve
- ✓ Operating lock against unauthorised operation

FLEXIBLE CONTROL OPTIONS

Stand-alone operation (push-to-pair):

- ✓ Manual operation and configuration directly on the device, e.g. for setting the heating profile, holiday mode, temperature changes, etc.
- ✓ Direct pairing of up to eight window/door contacts (HmIP-SWDM) and one wall thermostat (HmIP-WTH-B) possible

In a smart home together with the Homematic IP Access Point:

- ✓ Configuration and control via the free Homematic IP smartphone app
- ✓ Can be extended to a comprehensive smart home solution at any time

To enable operation, the device has to be connected with one of the following solutions:

- Stand-alone (push-to-pair)
- Homematic IP Access Point with free smartphone app and free cloud service
- Third-party solutions of partners

LOGISTICAL DATA

Product reference	153412A2	153412A0
EAN code	4047976534128	4047976534128
Short description	HmIP-eTRV-B-2	HmIP-eTRV-B-2
Packing unit	45	36
Packing dimensions	120 x 70 x 97 mm	122 x 140 x 97 mm
Weight incl. packaging	271,1 g	340,0 g

PACKAGE CONTENTS

Homematic IP Radiator Thermostat – basic
Danfoss RA adapter
Support ring
Mounting accessories
1.5 V LR6/mignon/AA batteries (2x)
User manual