

3.5" 30W 4 Ω Loudspeaker ZAC-LS4

Technical Documentation

FEATURES

- 3.5" coaxial audio loudspeaker.
- Compact loudspeaker with white metallic grille and fixing springs.
- Built-in 20mm tweeter.
- Flush-mounted.
- Dimensions Ø124 x 54,5mm.
- Conformity with the CE directives.




Figure 1. LS4 Loudspeaker


1. Metallic grille 2. Retaining springs 3. Loudsp	peaker magnet 4. Audio input 5. Tweeter
---	---

GENERAL SPECIFICATIONS	
CONCEPT	DESCRIPTION
Type of device	Electric operation control device
External power supply	Not required
Operation temperature	-15°C to +40°C
Storage temperature	-20°C to +55°C
Operation humidity	5 to 95% RH (no condensation)
Storage humidity	5 to 95% RH (no condensation)
Complementary characteristics	Class B
Protection class	
Operation type	Continuous operation
Device action type	Type 1
Electrical stress period	Long
Degree of protection	IP20, clean environment
Installation	Flush-mounted
Minimum clearances	Not required
Weight	420g

LOUDSPEAKER SPECIFICATIONS	
CONCEPT	DESCRIPTION
Maximum power (RMS)	30W
Loadspeaker model	Coaxial
Impedance	4Ω
Frequency response	150Hz – 20kHz
Sensitivity (1W, 1m)	84 dB _{SPL}
Installation hole diameter	105mm
Cable cross-section	0.5mm ² to 2.5mm ² (26-12AWG)
Connection method	Screw terminal block

ASSEMBLY DIAGRAM

- 1. Mark and make a hole for the loudspeaker by using the template bundled with the product.
- 2. Make the connections with the AudioInRoom device paying attention to the polarity.
- 3. Align the loudspeaker with the hole made on the surface and insert it with the aid of the retaining springs.
- 4. Place the metallic grille on the loudspeaker with the aid of the magnets.

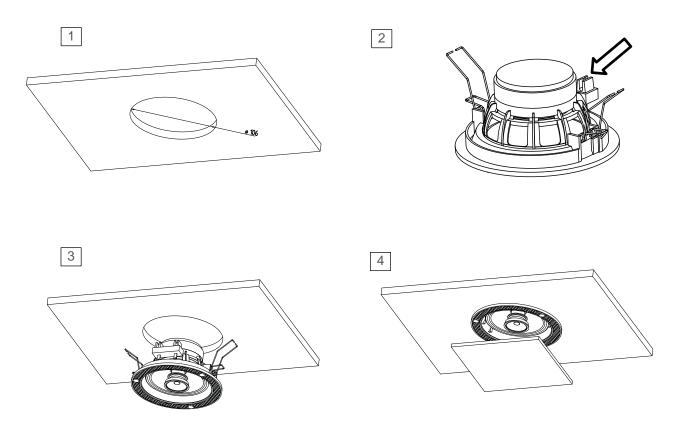



SAFETY INSTRUCTIONS

- Installation should only be performed by qualified professionals according to the laws and regulations applicable in each country.
- Keep the device away from water and do not cover it with clothes, paper or any other material while in use.
- The device must not be lubricated. Contact with dust, dirtiness or paint must be avoided.



• The WEEE logo means that this device contains electronic parts and it must be properly disposed of by following the instructions at http://zennio.com/weee-regulation.