



MTM56A

MULTI-TENANT MODULE

For connecting up to 56 DoorBird call buttons



TECHNICAL SPECIFICATIONS





Dimensions	125 x 74 x 34,5 mm (H x W x D) 4.92 x 2.91 x 1.36 in (H x W x D)
Connectors	 56 jacks for up to 56 original call buttons Screw terminal for 12 - 48 V DC, 1.5 A, for power supply of the call buttons For connecting with the door station series D21x: Connect with red cable of the door station
Scope of delivery	1x Multi-Tenant Module MTM56A 1x Power supply unit (main adaptor) with fou country-specific adaptors (110 - 240 V AC to 15 V DC) 1x Power over Ethernet splitter (PoE), 48 V DC and 12 V DC, max 1.5 A 1x Screwdriver
Approvals	IP40
Weather-proof	No
Weight	100 g
EAN	4260423868687
CURRENT SYSTEM RE	EQUIREMENTS
Supported door stations	D21x series with maximum one additional input device module


see www.doorbird.com/buy

The Multi-Tenant Module for the D21x IP Video Door Station enables the connection of up to 56 DoorBird call buttons.

Contrary to the MTM14E and MTM18A, the power supply is not provided centrally via the Door Station but via a separate connector using 12 - 48 V DC. The multi-tenant module comes with a plug-in power supply (110 - 240 V AC to 15 V DC) with 4 country adapters, as well as an alternative Power over Ethernet (PoE) splitter (PoE to 12 V DC, max 1.5 A), in case a second unused network cable with PoE is available at the installation site.

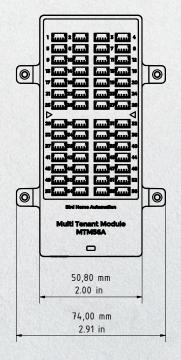





Sold separately